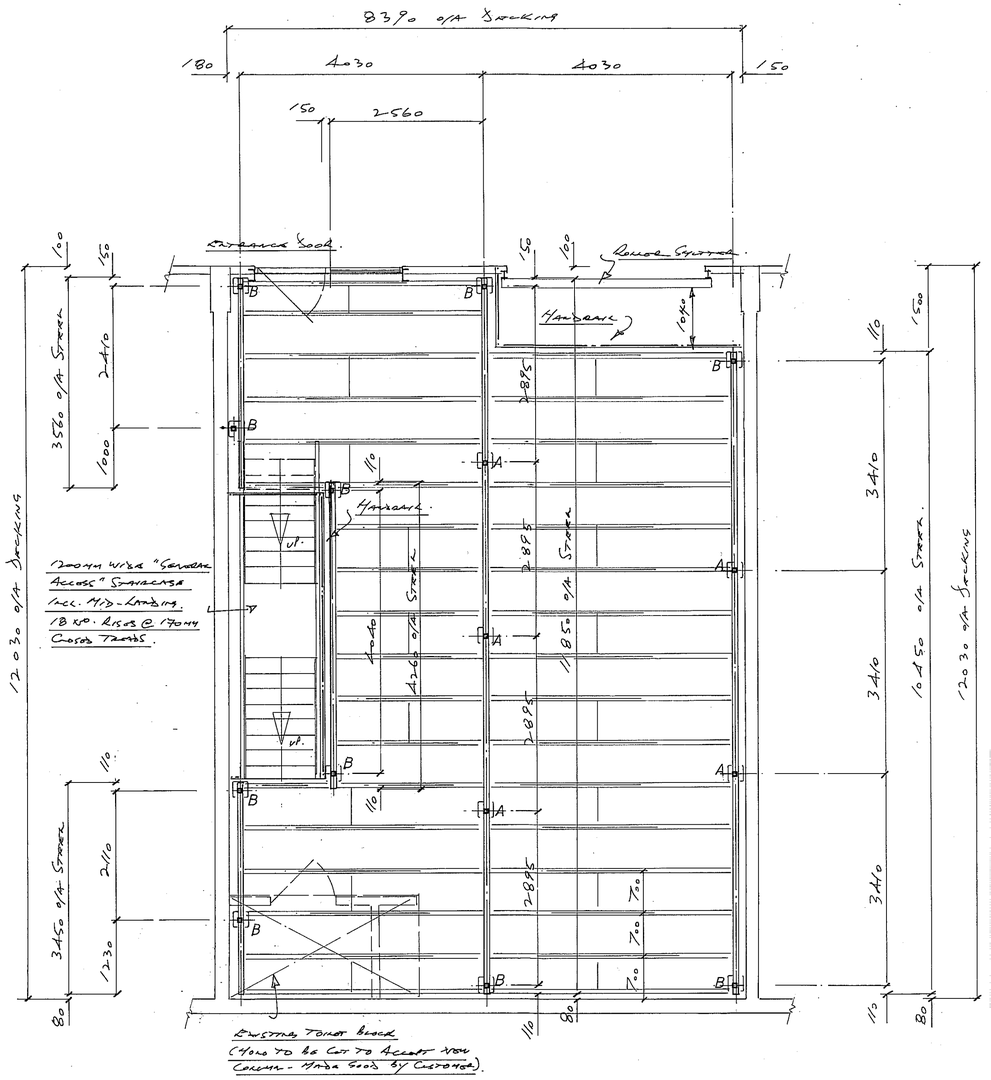

Proposed Mezzanine Floor Steelwork Layout.

Not to be reproduced or divulged to third parties without the written consent of FIRST FLOORS UK LTD

Revision	Amendments	Date

MEZZANINE FLOOR SPECIFICATION

Design Loading	2.5 Kn/m²
Finished Floor Height	3.060 m
Clear Underside Height	2.844 m.
Deck Surface Material	38mm High Density Particle Bd.
Mainbeams - Internal	178 x 102 x 19 Kg UB
Mainbeams - External	" " " "
Columns	90 x 90 x 5 mm RHS @ "A".
Columns	80 x 80 x 5 mm RHS @ "B".
Baseplates	300 x 300 x 15 mm @ "A"
Baseplates	220 x 220 x 15 mm @ "B".
Secondary Beams	20063 Ultrabeam.
Steelwork Colour	Blue Gloss
Steelwork Construction	Ultrabeam Pulling Inset.

FIRE PROTECTION SPECIFICATION

One Hour Fire Rated.

Underside:
600 x 600 x 16mm Fissured Mineboard Ceiling Tiles in an Exposed Grid Metal Suspension System. - u/s Ht. 2740 Appx.

Columns:
20mm "Promalit" in a Steel Encase in a Smooth White Finish.

Fascia:
15mm "Glasroc" Firecase.

BUILDING REGULATIONS

Local Authority: ..... Application Date: .....

CUSTOMERS APPROVAL

Signed ..... Date .....

CUSTOMER

TIDEBANK.

Site Address

Unit IL7, Daedulus Park, Daedulus Drive, LEE-ON-SOLENT, Hants. PO13 9FX.

FIRST FLOORS UK LTD

Unit 1A,
The Mill Industrial Park,
Alcester,
Warwickshire. B49 5QG

Tel: 01789 764172
Fax: 01789 766964
E-mail: sales@firstfloors.co.uk
Web: www.firstfloors.co.uk

Mezzanine Floors · Suspended Ceilings · Office & Industrial Partitioning · Lighting · Electrical Work · Racking & Shelving

Date	Scale	Checked by
9.4.19	1 - 50	
Drawn by R Paiol.	Drg. no. 5632	