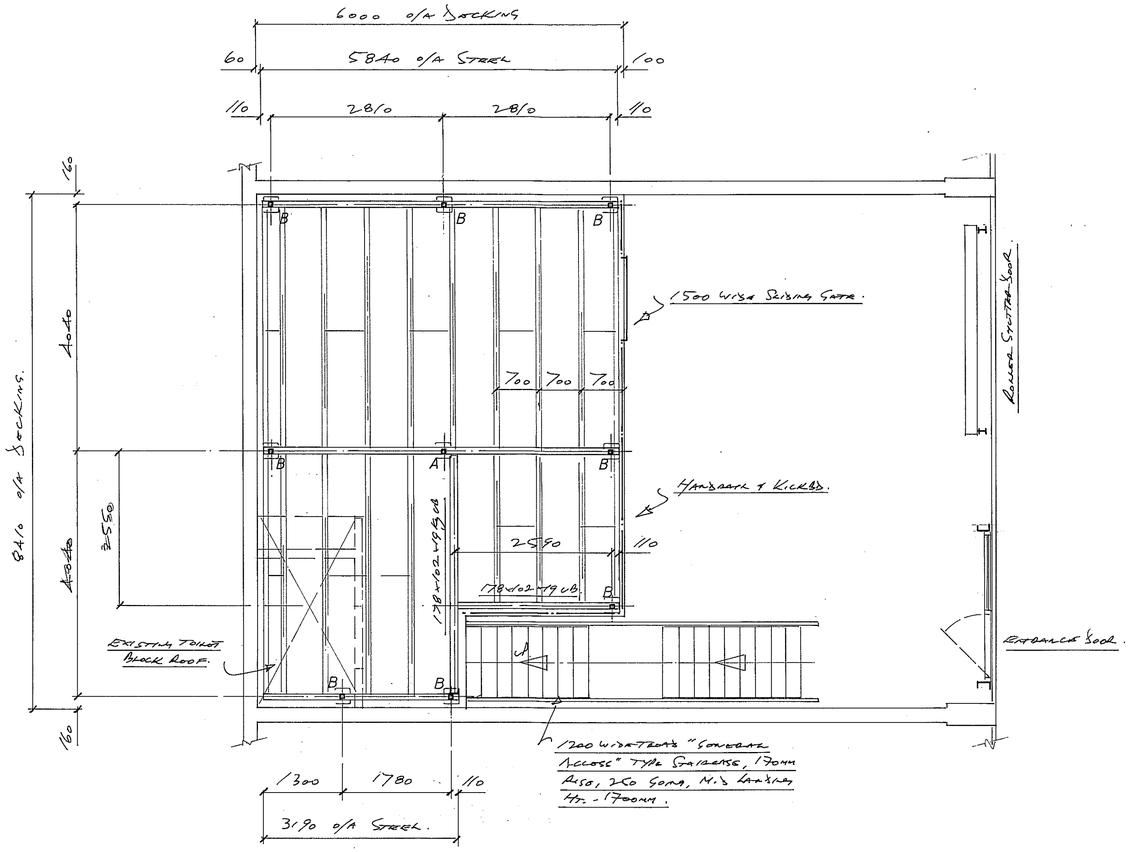

Proposed Mezzanine Floor Steelwork Layout.

Not to be reproduced or divulged to third parties without the written consent of FIRST FLOORS UK LTD

Revision	Amendments	Date

MEZZANINE FLOOR SPECIFICATION

Design Loading	2.5 Kn/m²
Finished Floor Height	3230 m.
Clear Underside Height	2992 m.
Deck Surface Material	38mm High Density Particle Bd
Mainbeams - Internal	178x102x19 Kg UB
Mainbeams - External	" " "
Columns	100x100x5mm RHS @ "A"
Columns	80x80x5mm RHS @ "B"
Baseplates	300x300x15mm @ "A"
Baseplates	220x220x15mm @ "B".
Secondary Beams	200 63 Ultrabeam
Steelwork Colour	Black Gloss
Steelwork Construction	Ultrabeam Purlins Inset.

FIRE PROTECTION SPECIFICATION

One Hour Fire Rated.

Underside:
600x600x16mm Fissured Mineboard Ceiling Tiles in an Exposed Grid Metal Suspension System - UK Ht. 2900mm. Appx.

Columns:
20mm "Promarit" in A Steel Encase in A White PVC Finish.

Fascia:
15mm "Glasroc" Multiboard.

BUILDING REGULATIONS

Local Authority: ..... Application Date: .....

CUSTOMERS APPROVAL

Signed ..... Date .....

CUSTOMER

TIDEBANK.

Site Address

Unit IN7, Daedulus Park, Daedulus Drive, LEE-ON-THE SOLENT, Hants. PO13 9FX.

FIRST FLOORS UK LTD

Unit 1A,
The Mill Industrial Park,
Alcester,
Warwickshire. B49 5QG

Tel: 01789 764172
Fax: 01789 766964
E-mail: sales@firstfloors.co.uk
Web: www.firstfloors.co.uk

Mezzanine Floors · Suspended Ceilings · Office & Industrial Partitioning · Lighting · Electrical Work · Racking & Shelving

Date 7.8.19	Scale 1-50	Checked by
Drawn by RPrior.	Drg. no. 5712	