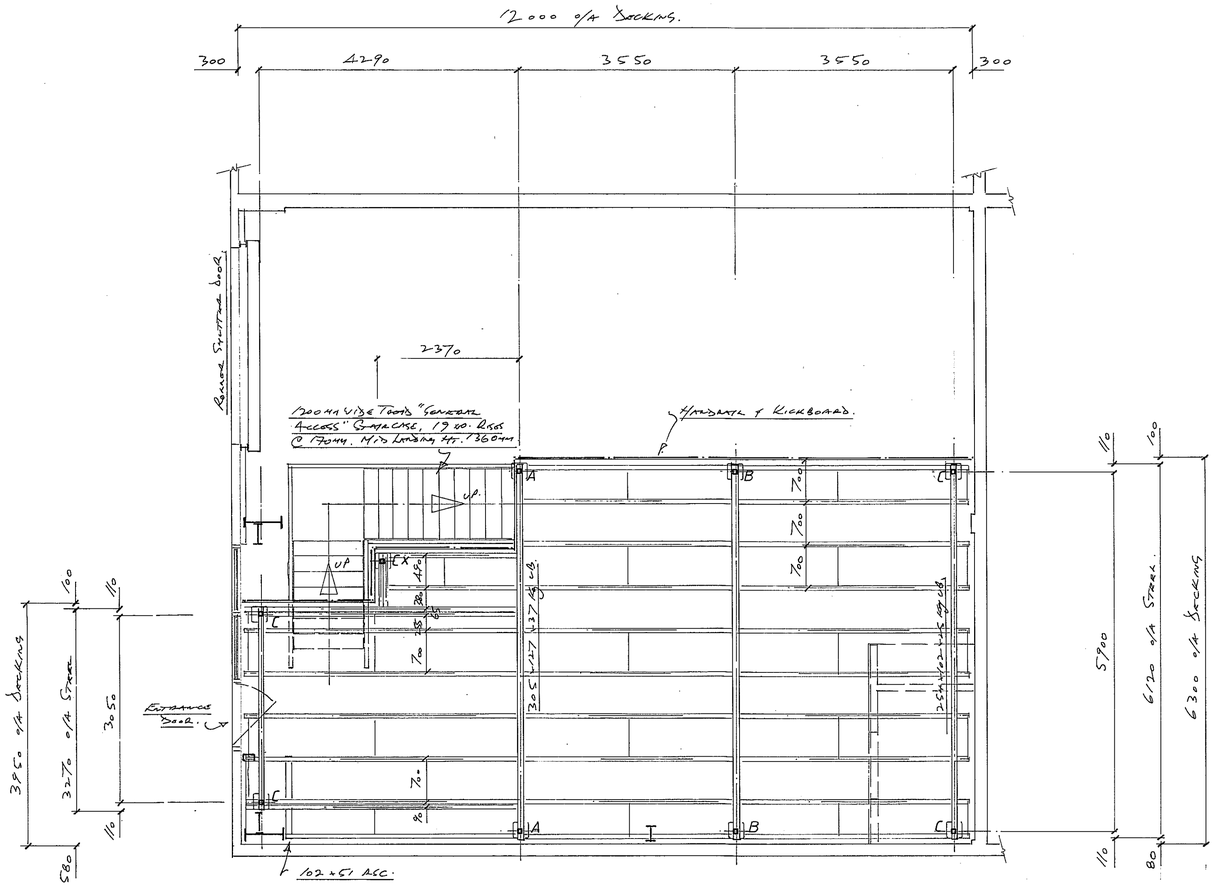

Proposed Mezzanine Floor Steelwork Layout.

Not to be reproduced or divulged to third parties without the written consent of FIRST FLOORS UK LTD

Revision	Amendments	Date

MEZZANINE FLOOR SPECIFICATION

Design Loading	2.5 Kn/m²
Finished Floor Height	3.230m.
Clear Underside Height	2.887m.
Deck Surface Material	38mm High Density Particle Board.
Mainbeams - Internal	305×102×33 Kg UB (E.W.S.)
Mainbeams - External	254×102×25 " " "
Columns	120×120×5mm RHS @ "A".
Columns	100×100×5 @ "B", 80×80×5 @ "C".
Baseplates	300×300×20mm @ "A"
Baseplates	300×300×15mm @ "B", 220×220×15 @ "C".
Secondary Beams	25563-4290 SDMN, 20063-Remainder
Steelwork Colour	Black Gloss
Steelwork Construction	Ultrabeam Purlins Inset.

FIRE PROTECTION SPECIFICATION

One Hour Fire Rated.

Underside:
600×600×16mm Fissured Mineboards in an Exposed Grid Metal Suspension System. U/S Ht. 2800 APPX.

Columns:
20mm "Promalit" in a Steel Enclose in a Smooth White Finish.

Fascia:
15mm "Glasroc F" Multiboard.

BUILDING REGULATIONS

Local Authority: ..... Application Date: .....

CUSTOMERS APPROVAL

Signed ..... Date .....

CUSTOMER

TIDEBANK.

Site Address
Unit IN8, Daedulus Drive, Daedulus Park, LEE-ON-THE-SOLENT, Hants. PO13 9FX.

FIRST FLOORS UK LTD

Unit 1A,
The Mill Industrial Park,
Alcester,
Warwickshire. B49 5QG

Tel: 01789 764172
Fax: 01789 766964
E-mail: sales@firstfloors.co.uk
Web: www.firstfloors.co.uk

Mezzanine Floors · Suspended Ceilings · Office & Industrial Partitioning · Lighting · Electrical Work · Racking & Shelving

Date	Scale	Checked by
25.6.19	1-50	
Drawn by R Prior.	Drg. no. 5683	